




9000-12000BTU Solar Air Conditioner with 550W Panels

Our Product Introduction

Basic Information

- Brand Name: Anbosunny
- Model Number: COL-09GW-ACDC-TH
- Minimum Order Quantity: 100
- Price: 450usd
- Packaging Details: cartoon box
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 30% deposit TT in advanced , 70% balance paid before delivery

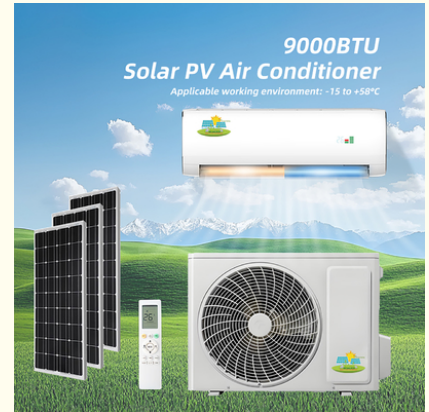

Product Specification

- Function: Cooling Only
- Power Capacity: 9000BTU-12000BTU
- PV Configuration: 550w Solar Panel *3
- Battery Configuration: 48V 100ah Battery *4
- Highlight: 9000-12000BTU solar air conditioner,
solar air conditioner with panels,
550W solar air conditioner

Product Description

Cooling & Heating Function On/Off Grid Solar Powered Solar Air Conditioner For Home Using

Product Attributes

Attribute	Value
Function	Cooling only
Power Capacity	9000BTU-12000BTU
PV Configuration	550w solar panel *3
Battery Configuration	48V 100ah battery *4

Product Description

- 100% energy saving in day time. Only solar panel drive
- AC grid power limiter, limit AC power from 0-600W
- AC power mode, DC power mode, AC+DC mix power supply (AC/DC Auto Balance)
- No inverter, no battery, no charge controller
- Full DC driven
- Wide operating temperature (-10 to 58)
- Long warranty years

Specifications

ITEMS	UNIT	COL-09GW-ACDC-TH	COL-12GW-ACDC-TH	COL-18GW-ACDC-TH	COL-24GW-ACDC-TH
Grid power voltage	V/Hz	208-240V / 50/60 Hz 110/120V 60Hz	208-240V / 50/60 Hz 110/120V 60Hz	208-240V / 50/60 Hz	208-240V / 50/60 Hz
Solar power voltage	V	DC 90-380V	DC 90-380V	DC 90-380V	DC 90-380V
Cooling capacity	BTU	9000(2900-12000)	12000 (3500-15500)	18000 (6900-19000)	24000 (6900-26000)
Heating capacity	BUT	9500 (850-12000)	13000 (3900-16000)	19800 (6900-19500)	24000(6900-27000)
Cooling power input	W	690 (130-1350)	1030 (260-1700)	1520(410-1970)	2100 (410-2600)
Heating power input	W	670 (120-1280)	980 (220-1360)	1550 (350-1670)	2180 (410-2650)
max power input	w	1450	1870	2860	3800
SEER Cooling	W/W	SEER 6.6	SEER 6.6	SEER 6.6	SEER 6.6
SEER COOLING	BTU/H/W	SEER 22.52	SEER 22.52	SEER 22.52	SEER 22.52
SCOP HEATING	W/W	SCOP 4.6	SCOP 4.6	SCOP 4.0	SCOP 4.0
SCOP HEATING	BTU/H/W	SCOP 15.7	SCOP 15.7	SCOP 13.6	SCOP 13.6
Air flow volume	m3/h	650	650	900	1200
Outdoor net dimension	mm	795*290*555	795*290*555	795*290*555	860*304*733
Outdoor packing dimension	mm	910*400*630	910*400*630	910*400*630	1005*450*820
Indoor net dimension	mm	895*203*300	895*203*300	1000*240*310	1130*245*320
indoor packing dimention	mm	965*275*370	965*275*370	1075*310*385	1195*310*390
Indoor unit weight	kg	12	12	15	17.5
Outdoor unit weight	kg	38	38	43	55
Loading QTY	20GP/40GP/40HQ	90/176/194	90/176/194	79/160/180	50/105/120

 Zhejiang Newle Electric Appliance Co., Ltd.



15355158390



amy@newlechina.com



airfryerfactory.com

789th, Qiming Road, Yinzhou District, Ningbo City